NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 5HST15 @2100 R.P.M

5HST15/X/0111

PUMPSENSE

HST RANGE

MODEL 5HST15	WORKING PRESS.	16 bar
SIZE 150x125-360	TEST PRESS.	24 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 2100 rpm

RATED CAPACITY - 1000 USGPM

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Max. Impeller Dia.	360mm
Min. Impeller Dia.	260mm
Impeller Drg. No.	5HST15/HD003/0
Volute Drg. No.	5HST15/HD001/0
Hydraulic Data	
Eye Area 339cm²	Throat Area 36cm²
Impeller Width 30mm	No. of Vanes 6
Volute Construction - Single Volute	
Shaft Gr. : 2.5S	

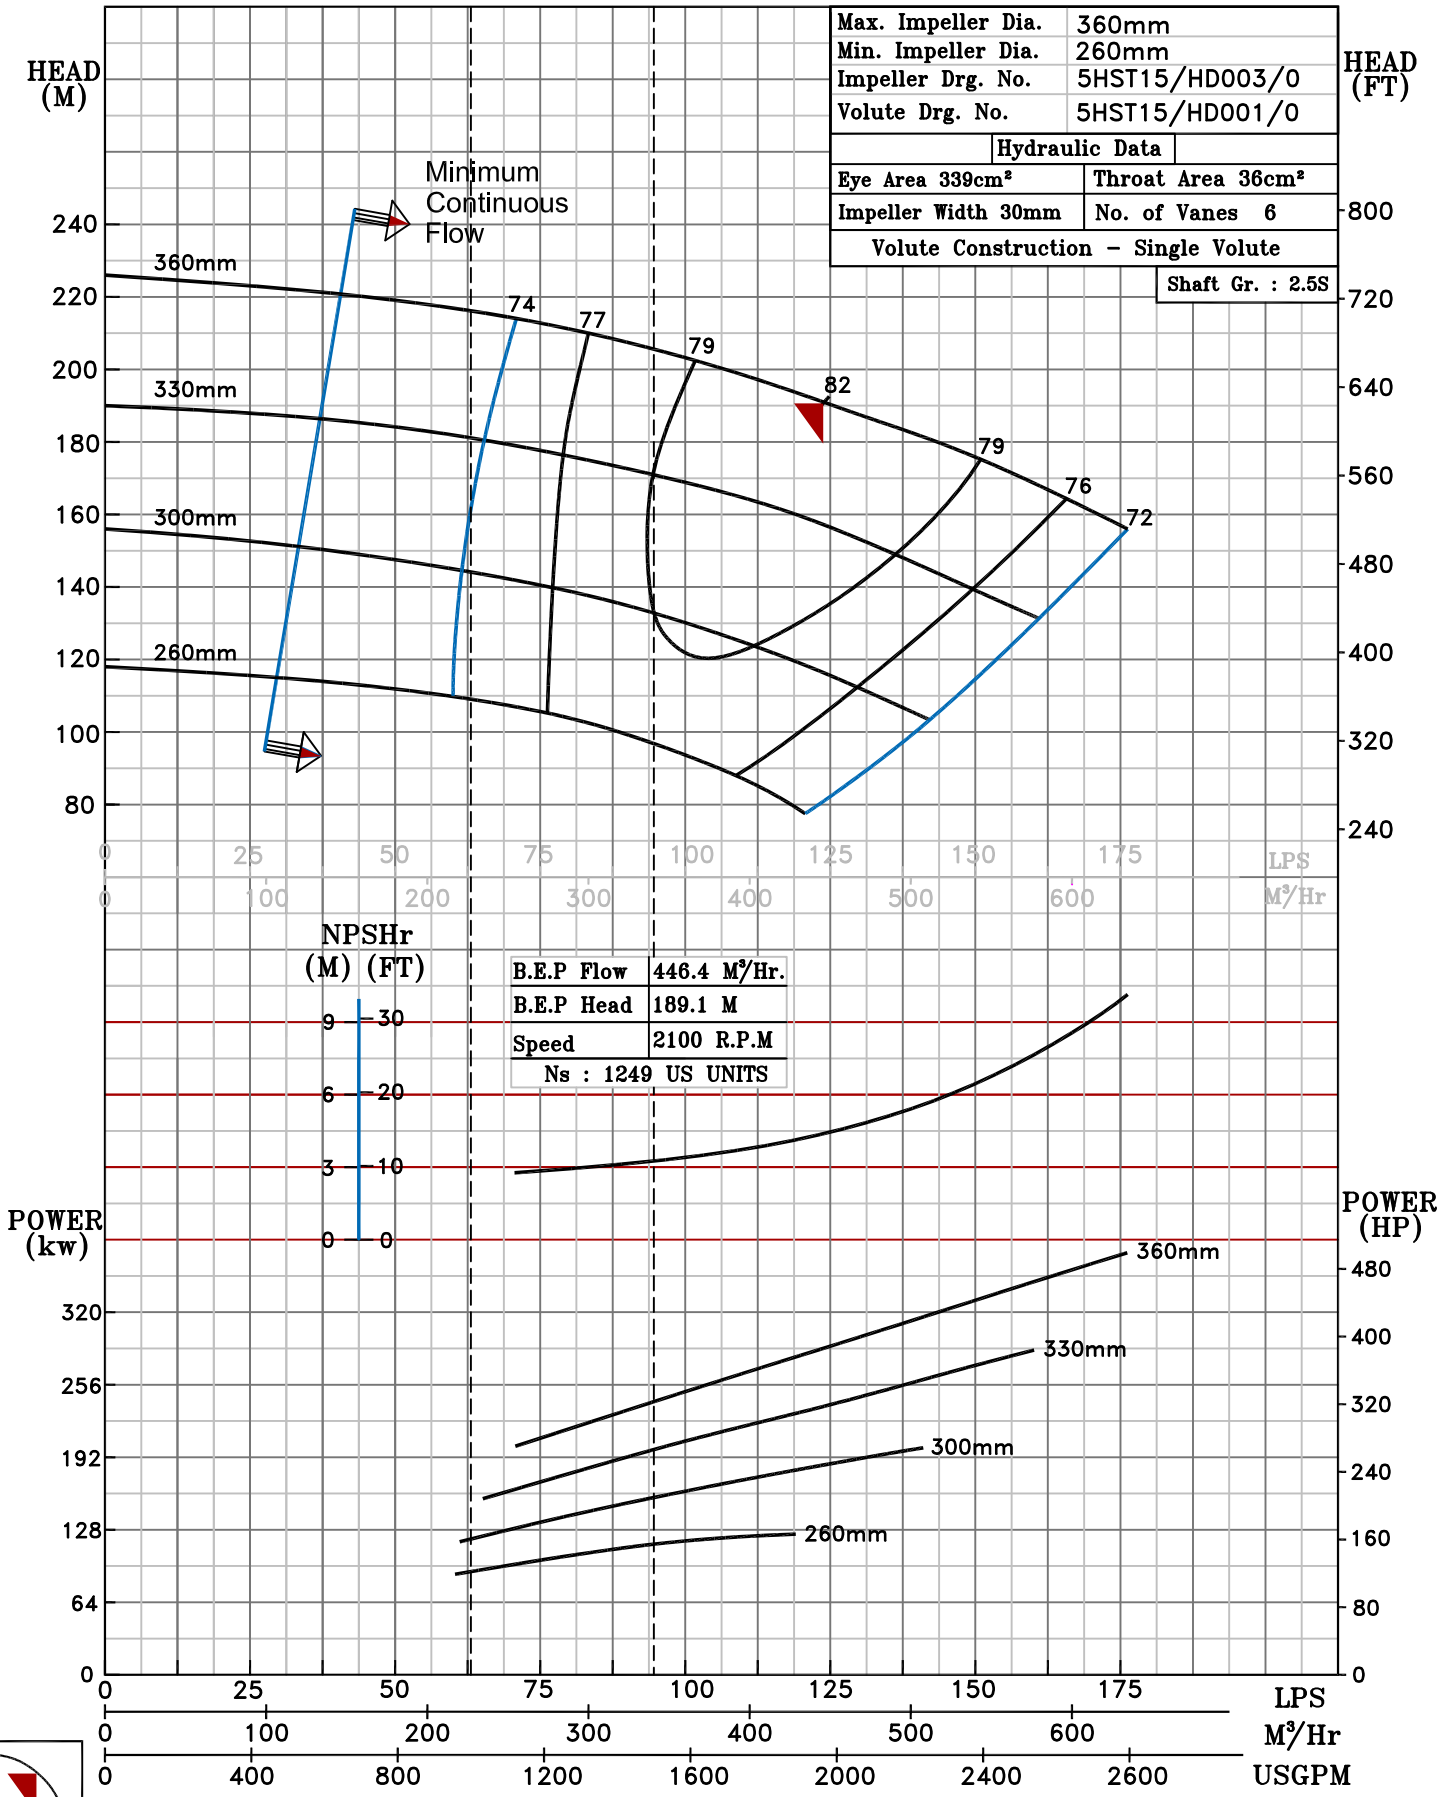

B.E.P

2100 RPM