

PERFORMANCE CURVE OF 5HF10H @2800 R.P.M



Underwriters Laboratories

MODEL 5HF10H

SIZE 150x125-252

HF RANGE

TYPE-AXIALLY SPLIT CASE SINGLE STAGE



RATED CAPACITY - 750 USGPM

SPEED 2800 rpm


TEST DATE- 22.03.23

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Curve No.	8047B_UL4	Max. Impeller Dia.	252mm
Impeller No.	838G030PJ	Min. Impeller Dia.	210mm
		Shaft	Gr-1.5F

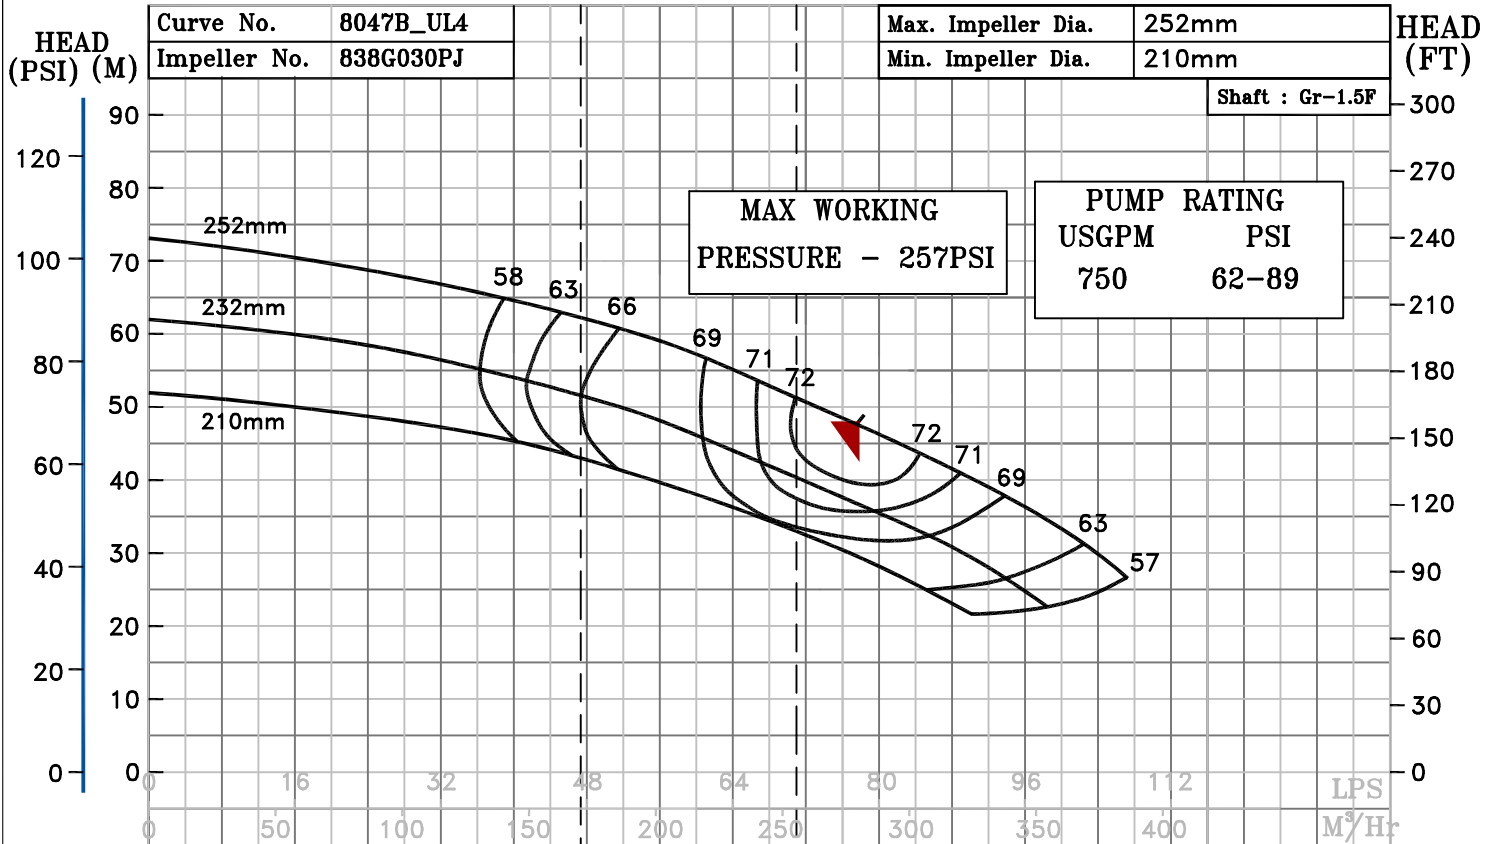

B.E.P Flow	280 M³/Hr.
B.E.P Head	48 M
Speed	2800 R.P.M
Ns	: 2215 US UNITS

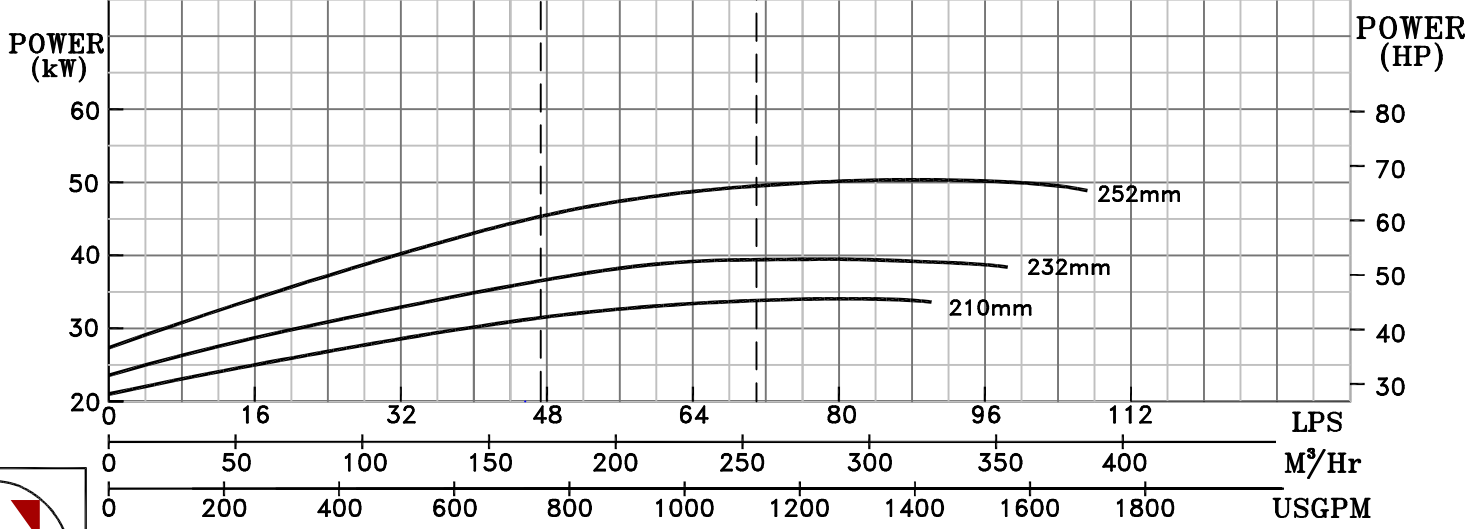

2800 RPM