

PERFORMANCE CURVE OF 5HF10H @2950 R.P.M



Underwriters Laboratories

MODEL 5HF10H

SIZE 150x125-252

HF RANGE

TYPE-AXIALLY SPLIT CASE SINGLE STAGE


RATED CAPACITY - 750 USGPM

SPEED 2950 rpm

TEST DATE- 22.03.23


PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Curve No.	804752_UL4	Max. Impeller Dia.	252mm
Impeller No.	838G030PJ	Min. Impeller Dia.	210mm
		Shaft	Gr-1.5F

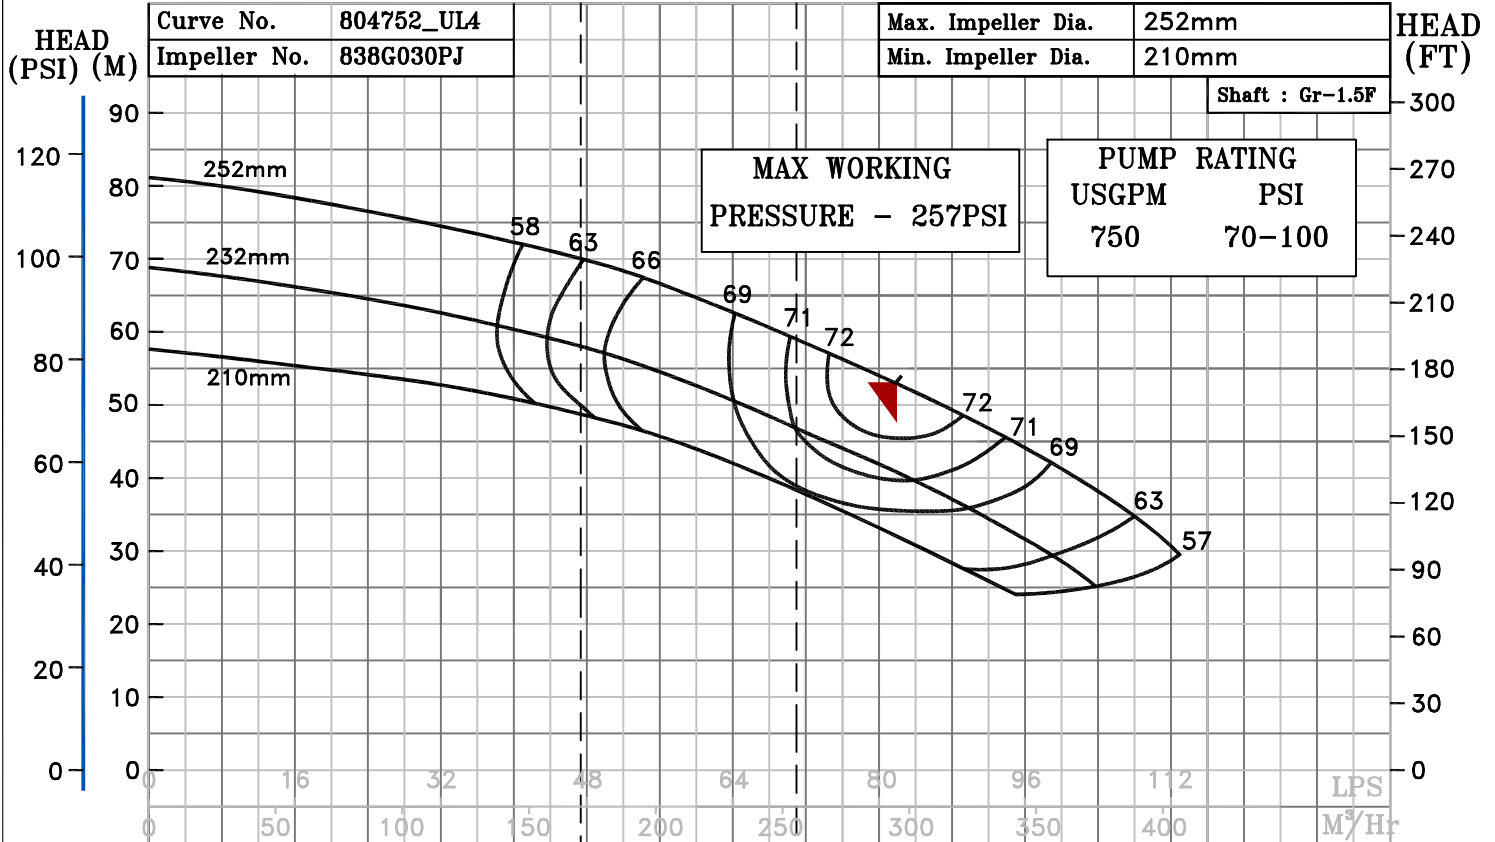

(M)	(FT)
6	18
4	12
2	6
0	0

B.E.P Flow	295 M <sup>3</sup> /Hr.
B.E.P Head	53.2 M
Speed	2950 R.P.M
Ns	: 2215 US UNITS

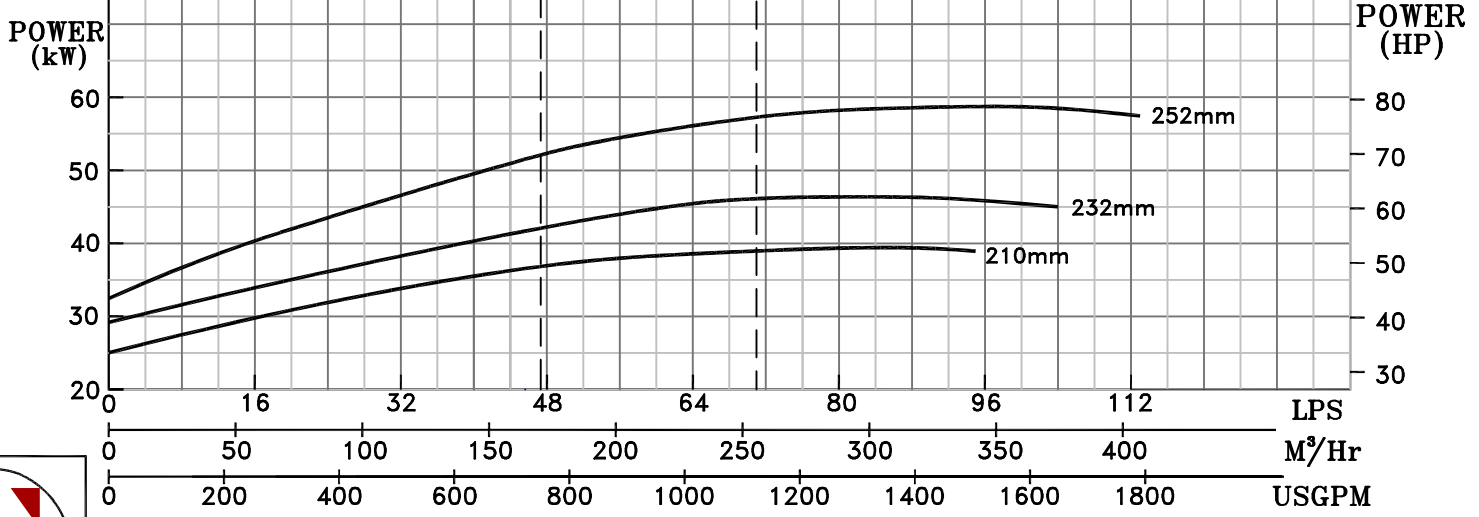

2950 RPM