

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PRELIMINARY CURVE OF 4HF10H @3300 R.P.M



HF RANGE

MODEL 4HF10H
SIZE 150x100-252




Underwriters Laboratories


TYPE-AXIALLY SPLIT CASE SINGLE STAGE
SPEED 3300 rpm

RATED CAPACITY - 750 USGPM

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

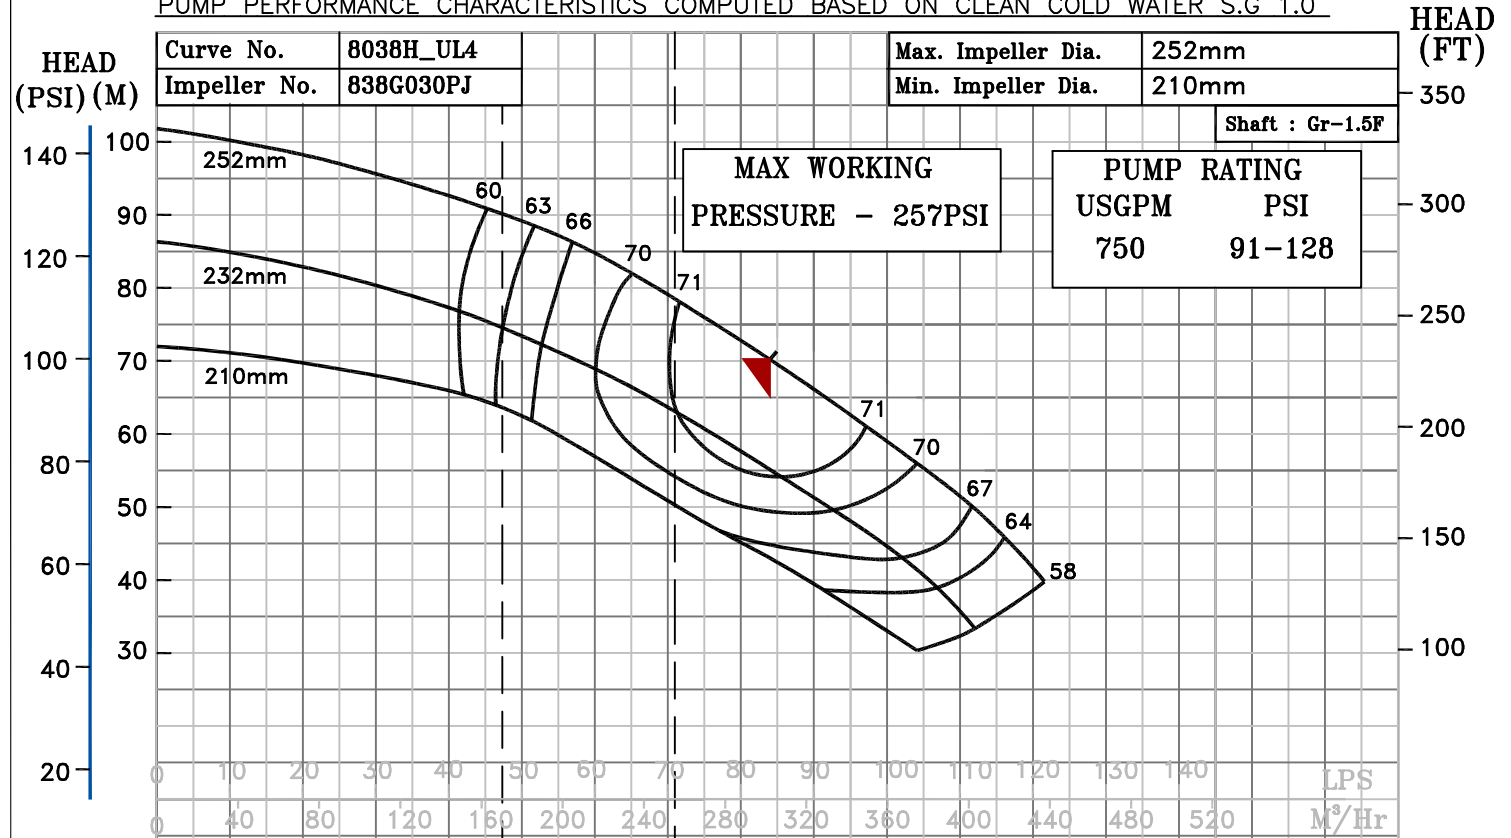

B.E.P Flow	302.1 M ³ /Hr.	NPSHr (M) (FT)
B.E.P Head	70.1 M	
Speed	3300 R.P.M	
Ns	2038 US UNITS	

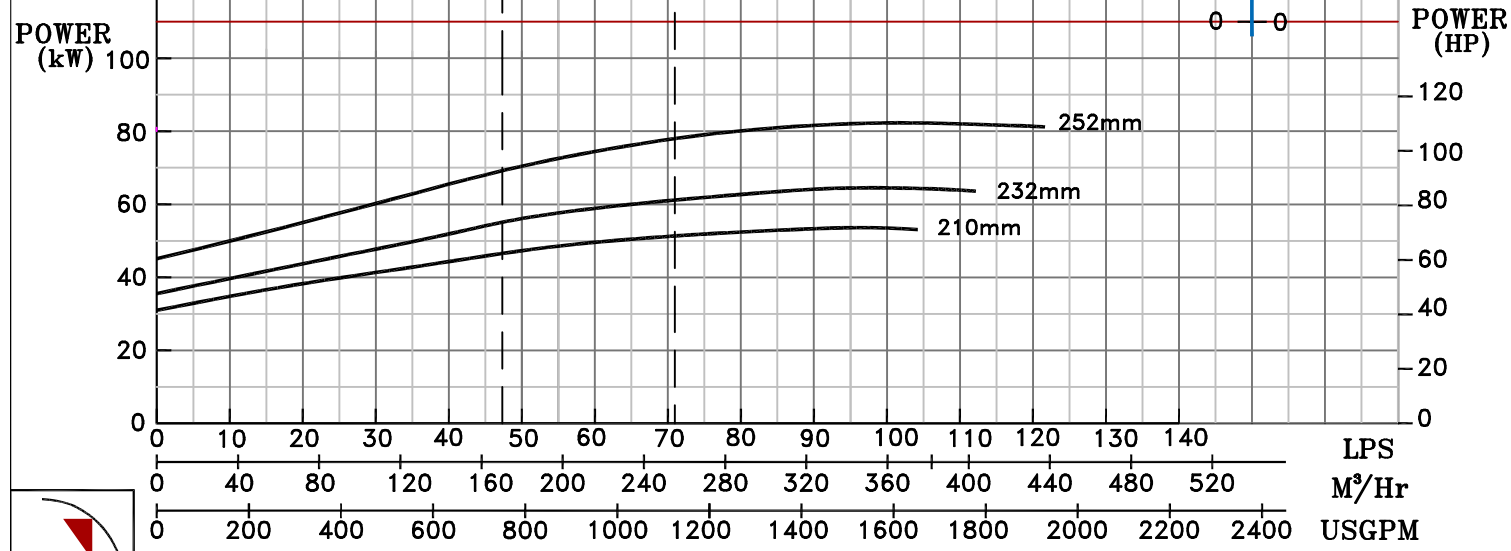

3300 RPM