

PERFORMANCE CURVE OF 6HF10 @ 2800 R.P.M



HS RANGE

MODEL 6HF10
SIZE 150x150-255
TYPE-AXIALLY SPLIT CASE SINGLE STAGE






Underwriters Laboratories

RATED DUTY - 1000,1250 USGPM

SPEED 2800 rpm
TEST DATE- 16.10.20

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Curve No.	1079B	Max. Impeller Dia.	255mm
Impeller No.	179G030P-MK2	Min. Impeller Dia.	214mm
		Shaft	Gr-2F

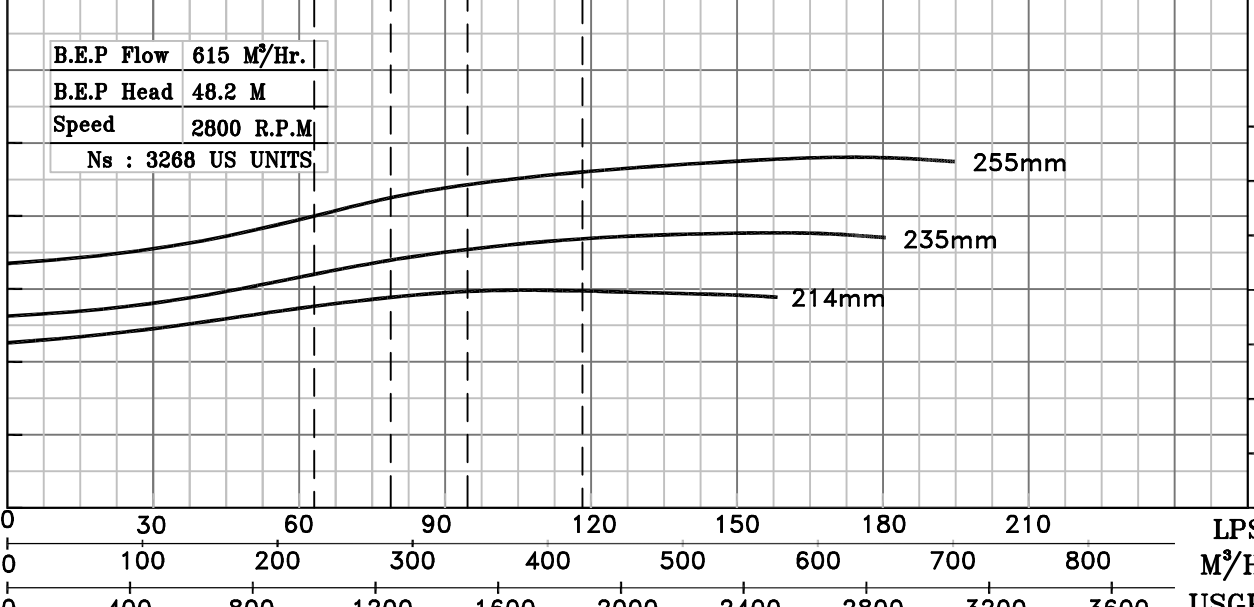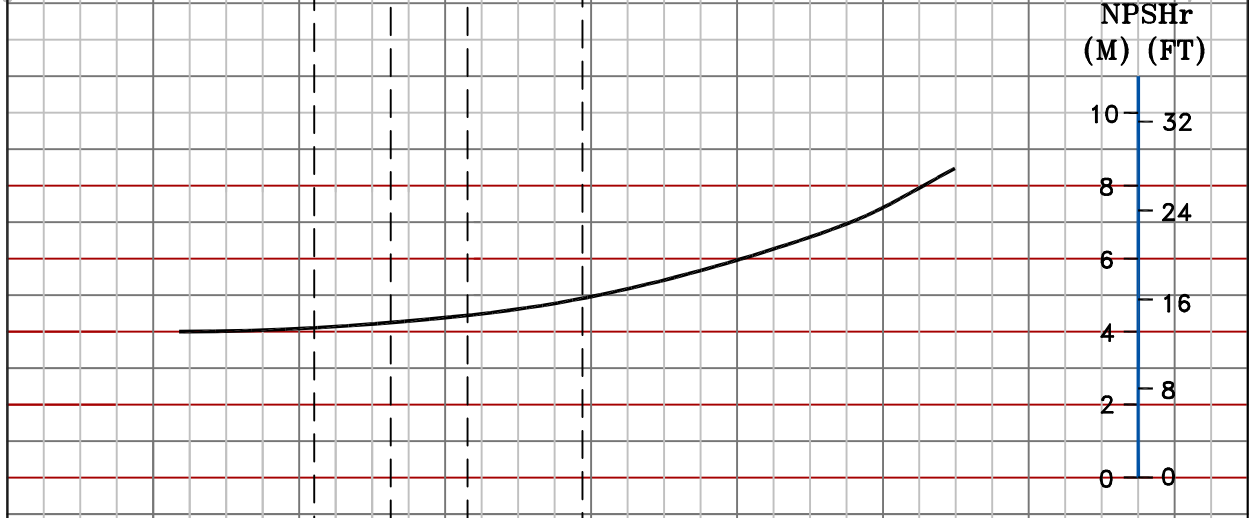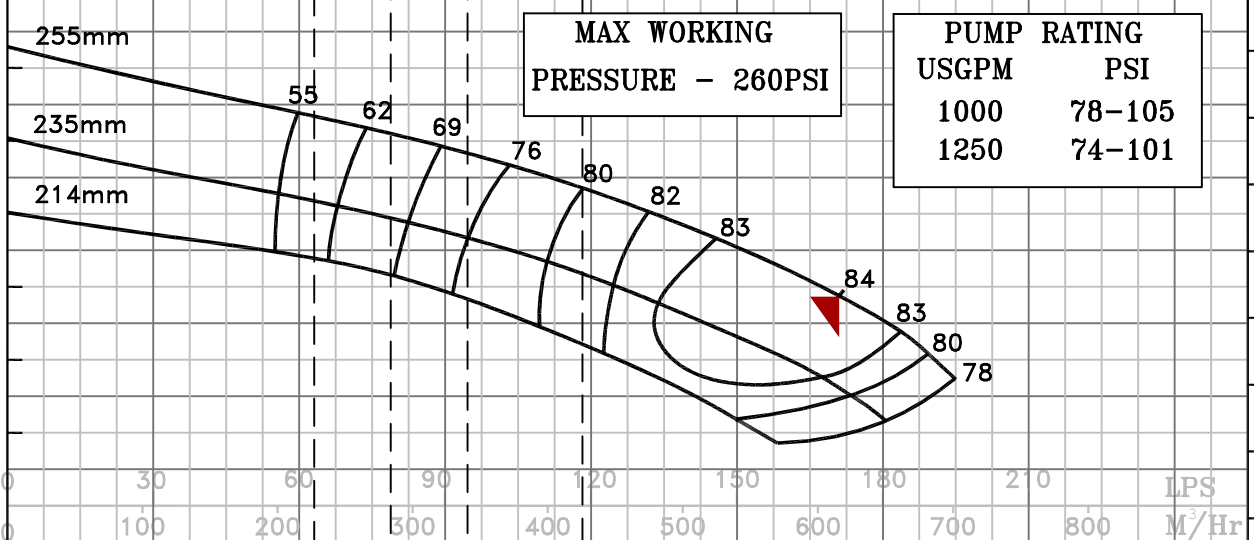

2800 RPM

HEAD (PSI) (M)

HEAD (FT)

POWER (kW)

POWER (HP)

