

TEST CURVE OF 6HFTD12L @2800 R.P.M



HFT RANGE

MODEL 6HFTD12L



Underwriters Laboratories

SIZE 200x150-314

TYPE-AXIALY SPLIT CASE TWO STAGE

RATED CAPACITY - 1000 USGPM

SPEED 2800 rpm

TEST DATE- 17.12.19


PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Curve No.	9013B	Max. Impeller Dia.	314mm
Impeller No.	913G030P	Min. Impeller Dia.	260mm

Shaft : Gr-3F

MAX WORKING PRESSURE - 443PSI

PUMP RATING	
USGPM	PSI
1000	210-306

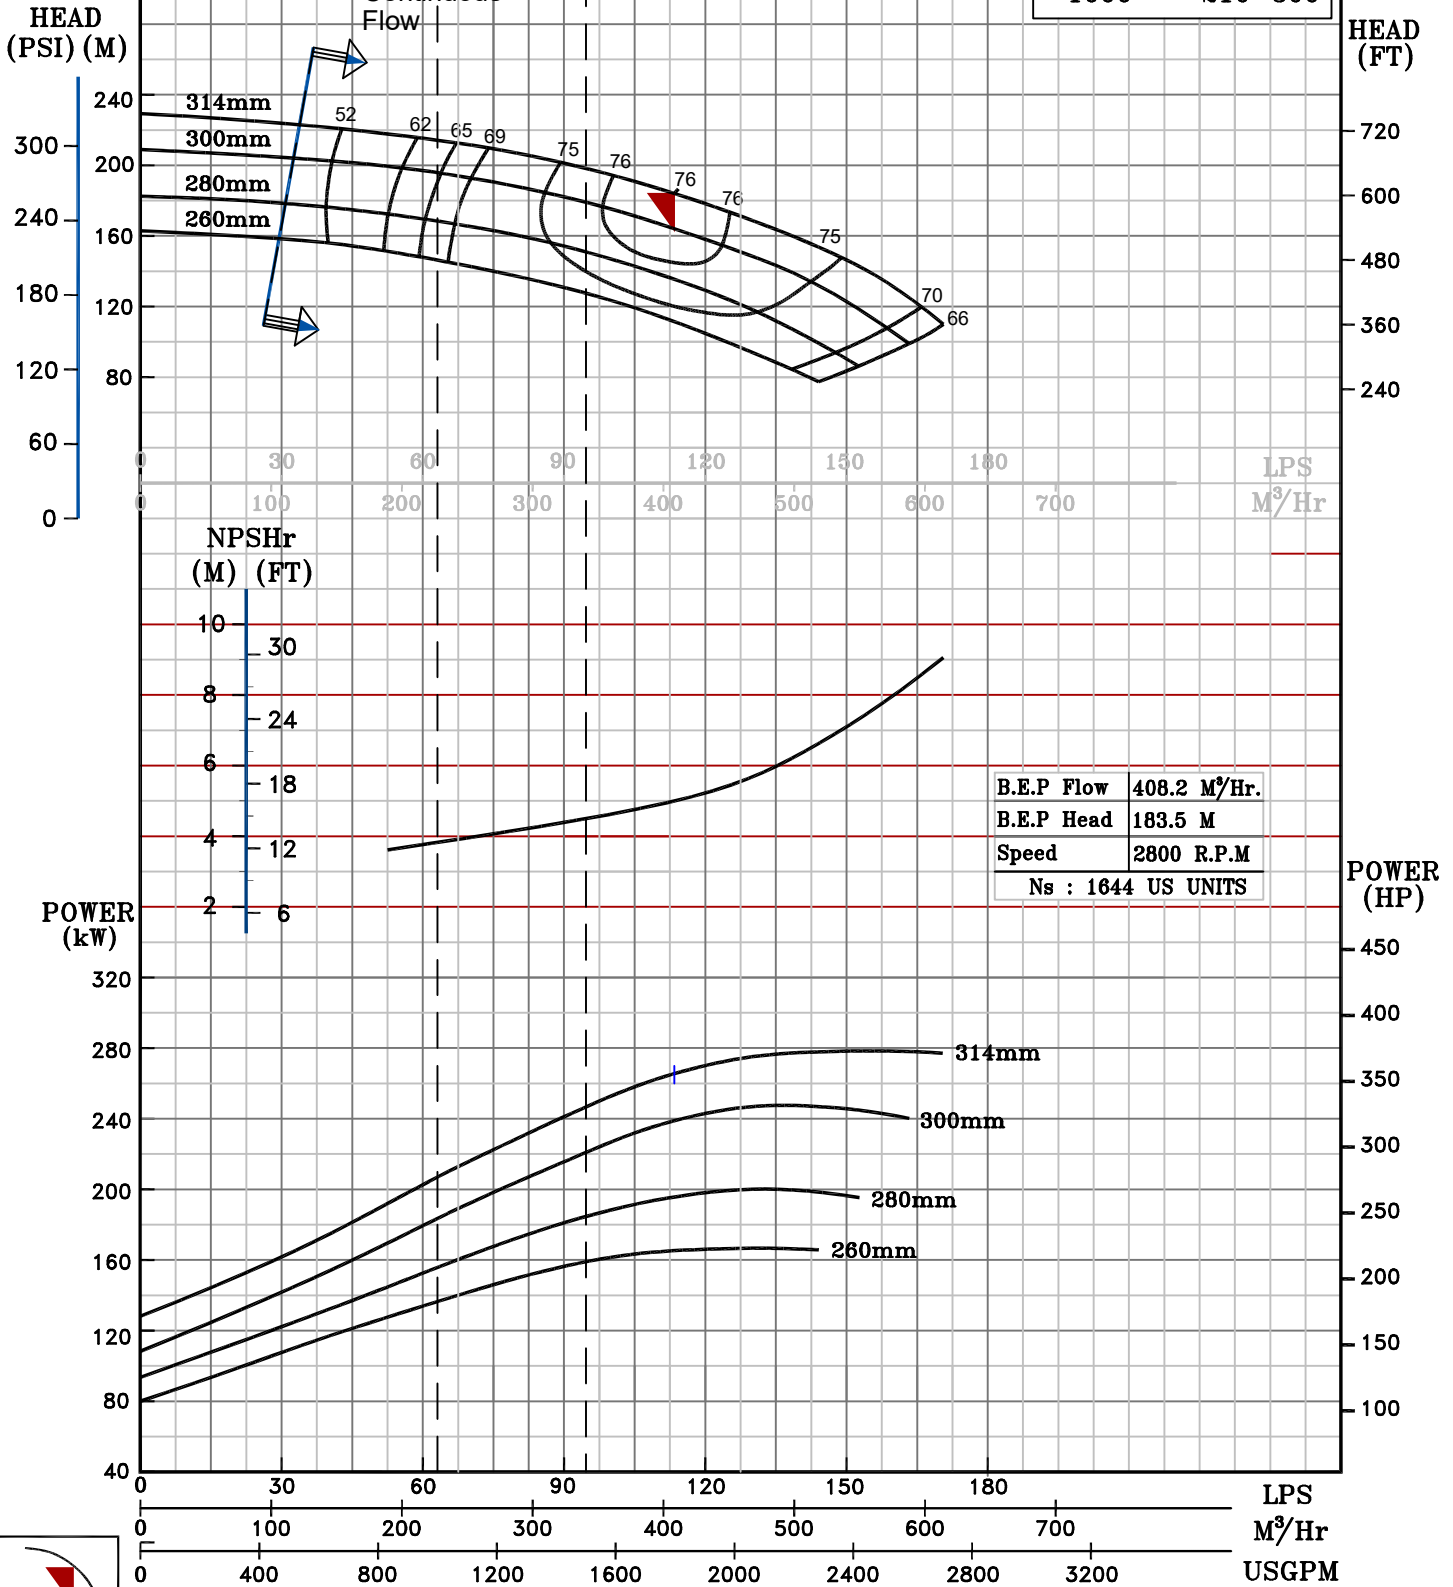

2800 RPM