

PERFORMANCE CURVE OF 6HFTD12L @2900 R.P.M



MODEL 6HFTD12L



Underwriters Laboratories

SIZE 200x150-314

HFT RANGE

TYPE-AXIALLY SPLIT CASE TWO STAGE

RATED CAPACITY - 1000,1250 USGPM


SPEED 2900 rpm

TEST DATE- 17.12.19

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Curve No.	9013K	Max. Impeller Dia.	314mm
Impeller No.	913G030P	Min. Impeller Dia.	260mm

Shaft : Gr-3F

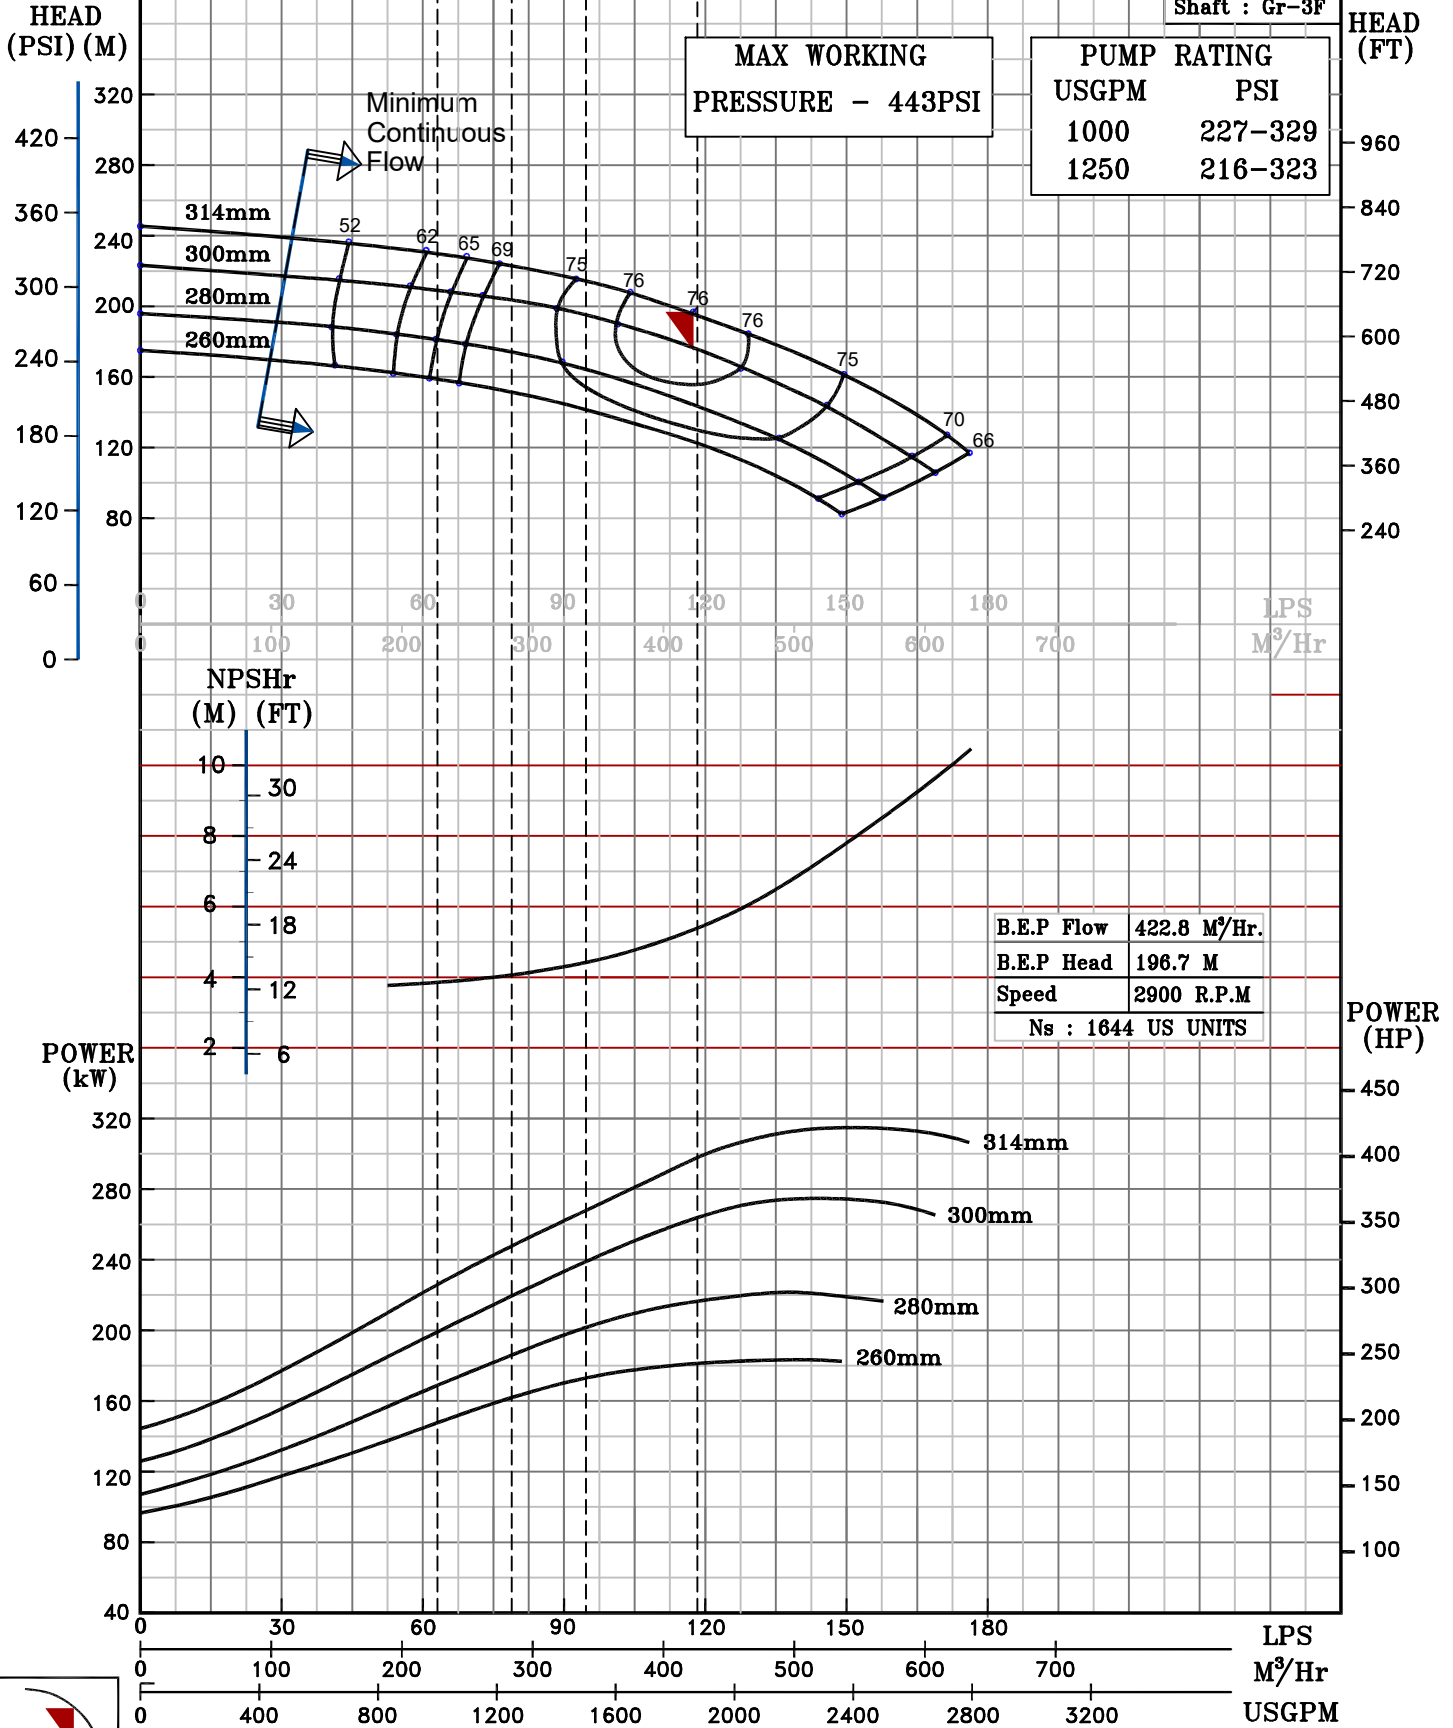

2900 RPM