

PERFORMANCE CURVE OF 6HFTD12L @2975 R.P.M



MODEL 6HFTD12L



Underwriters Laboratories

SIZE 200x150-314

HFT RANGE

TYPE-AXIALLY SPLIT CASE TWO STAGE

RATED CAPACITY - 1000,1250 USGPM


SPEED 2975 rpm

TEST DATE- 17.12.19

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Curve No.	901352	Max. Impeller Dia.	314mm
Impeller No.	913G030P	Min. Impeller Dia.	260mm

Shaft : Gr-3F

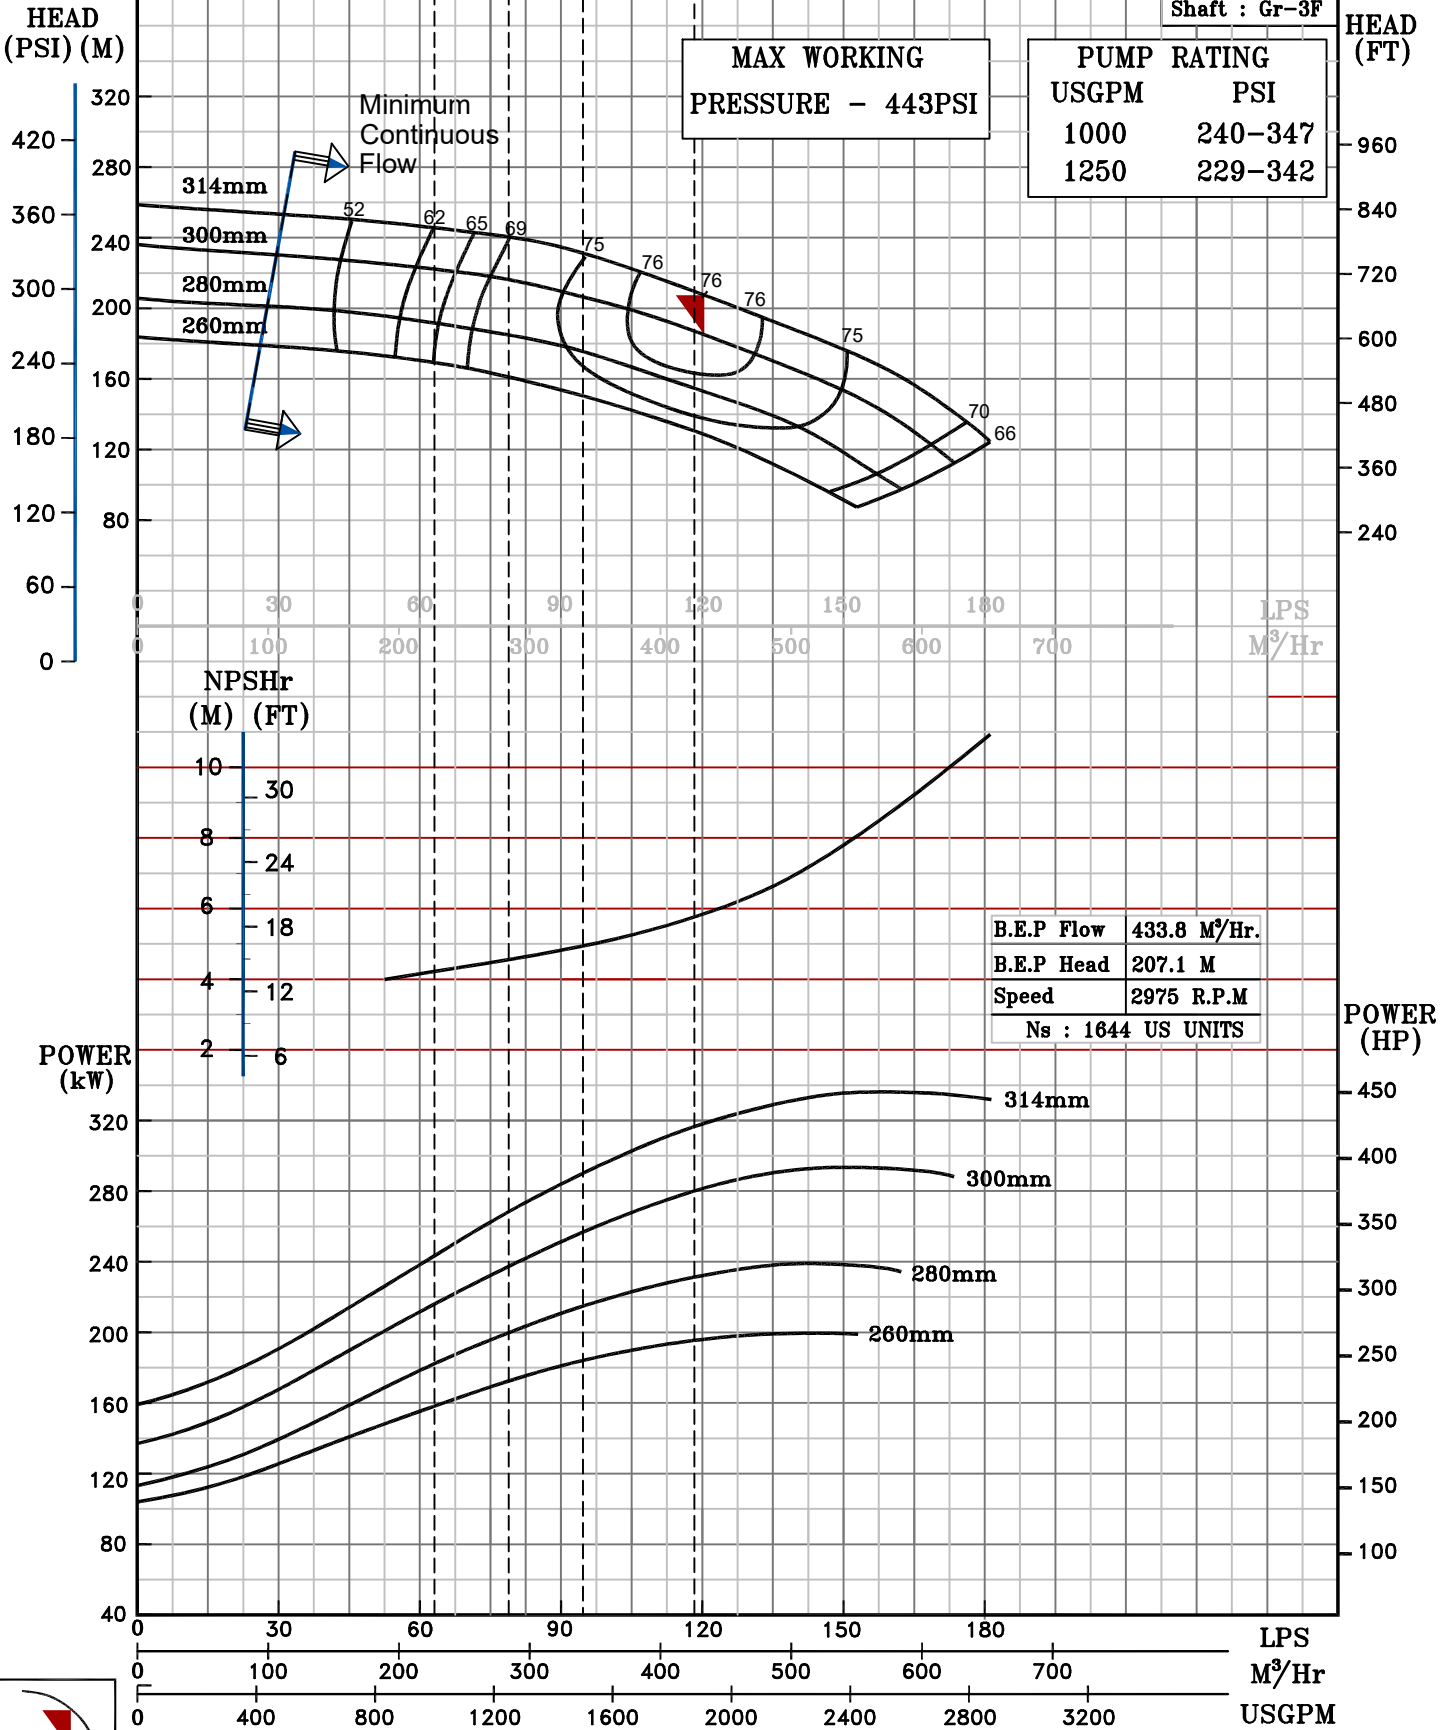

PUMP RATING	
USGPM	PSI
1000	240-347
1250	229-342

B.E.P Flow	433.8 M³/Hr.
B.E.P Head	207.1 M
Speed	2975 R.P.M
Ns	1644 US UNITS



2975 RPM