

PERFORMANCE CURVE OF EF125-310 @2600 R.P.M



EF125-310  
 SIZE 150x125-311  
 TYPE-END SUCTION BACK PULL OUT



Underwriters  
 Laboratories


*EF RANGE*

SPEED 2600 rpm

RATED CAPACITY - 750 USGPM

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Curve No.	10003A_UL4	Max. Impeller Dia.	311mm
Impeller No.	1003G030P	Min. Impeller Dia.	250mm

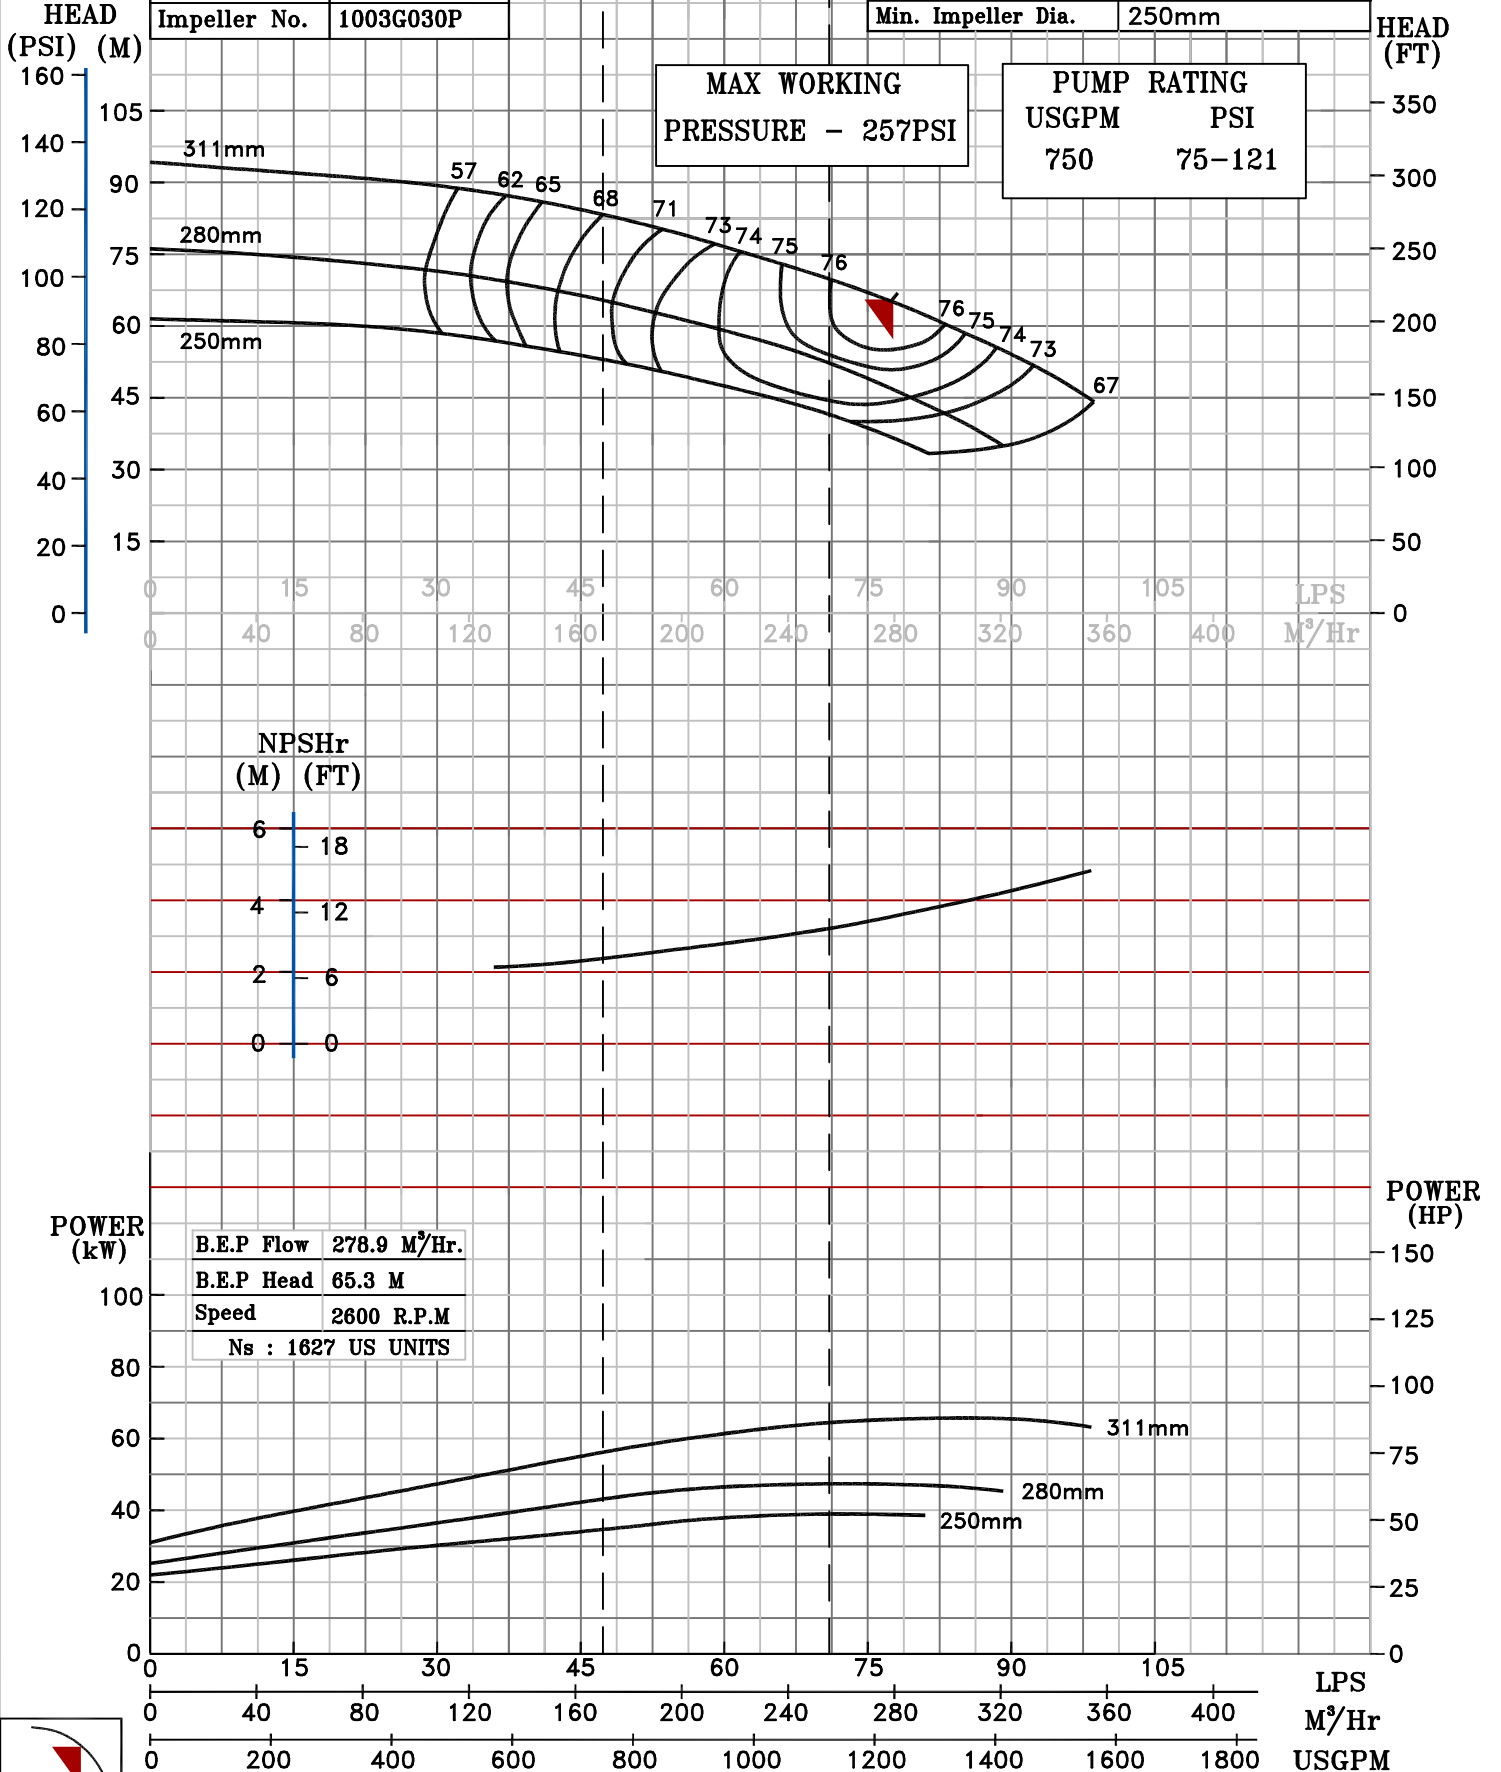

MAX WORKING  
 PRESSURE - 257PSI

PUMP RATING  
 USGPM PSI  
 750 75-121

6	18
4	12
2	6
0	0

B.E.P Flow	278.9 M³/Hr.
B.E.P Head	65.3 M
Speed	2600 R.P.M
Ns	1627 US UNITS



2600 RPM