

PERFORMANCE CURVE OF EF125-310 @2800 R.P.M



EF125-310
SIZE 150x125-311



Underwriters
Laboratories

EF RANGE


TYPE-END SUCTION BACK PULL OUT

SPEED 2800 rpm

RATED CAPACITY - 750 USGPM

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Curve No.	10003B_UL4	Max. Impeller Dia.	311mm
Impeller No.	1003G030P	Min. Impeller Dia.	250mm

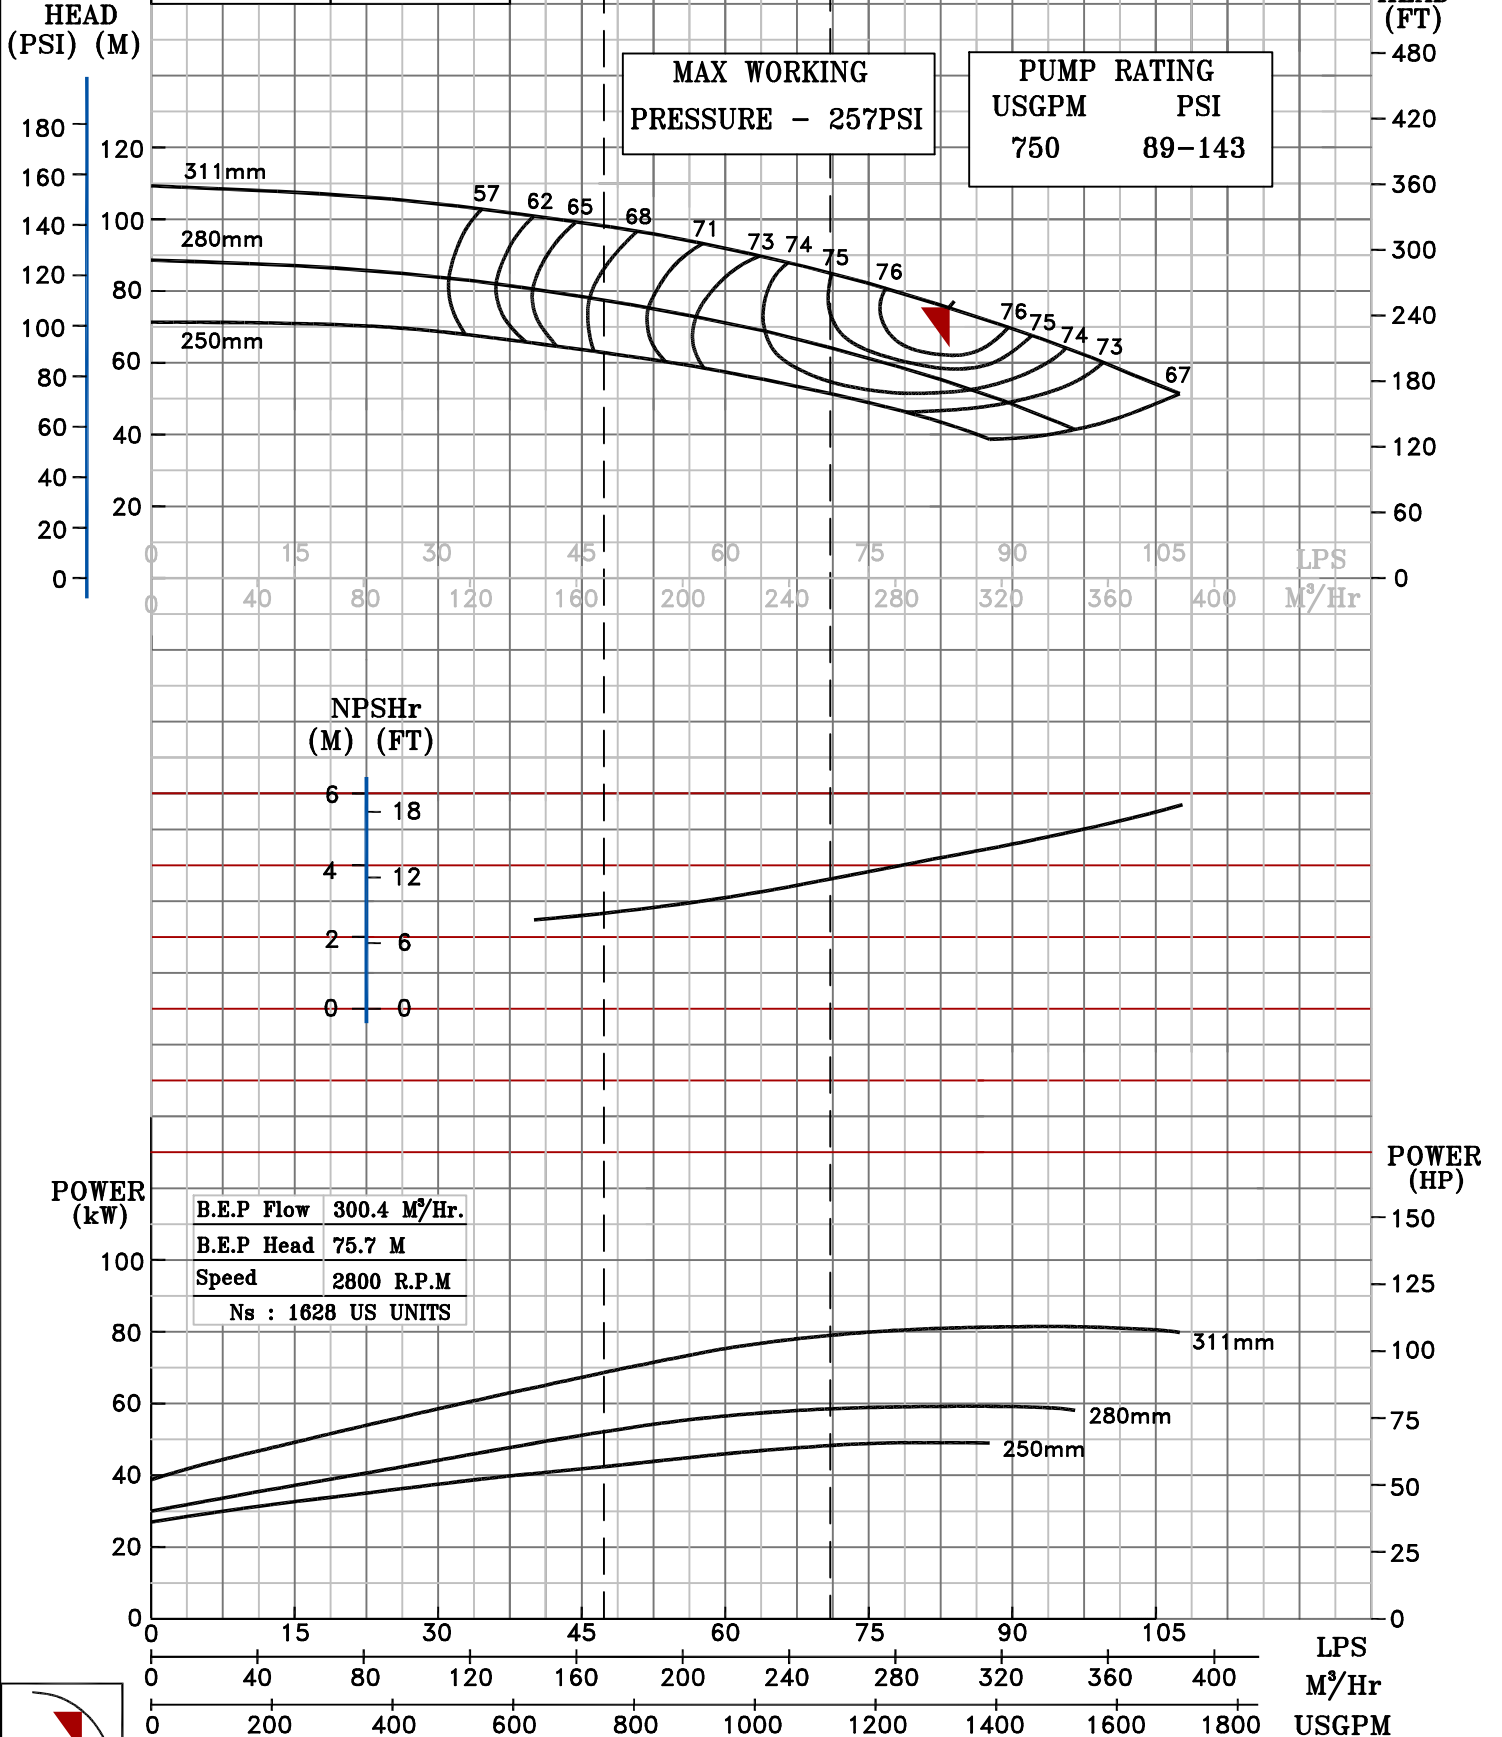

MAX WORKING
PRESSURE - 257PSI

PUMP RATING
USGPM PSI
750 89-143

NPSHr
(M) (FT)

6 - 18
4 - 12
2 - 6
0 - 0

B.E.P Flow 300.4 M³/Hr.
B.E.P Head 75.7 M
Speed 2800 R.P.M
Ns : 1628 US UNITS



2800 RPM