

PERFORMANCE CURVE OF EF125-310 @2950 R.P.M



EF125-310  
SIZE 150x125-311



Underwriters  
Laboratories

EF RANGE

TYPE-END SUCTION BACK PULL OUT

SPEED 2950 rpm


RATED CAPACITY - 750 USGPM

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0


|              |             |                    |       |
|--------------|-------------|--------------------|-------|
| Curve No.    | 1000352_UL4 | Max. Impeller Dia. | 311mm |
| Impeller No. | 1003G030P   | Min. Impeller Dia. | 250mm |

MAX WORKING  
PRESSURE - 257PSI

| PUMP RATING |         |
|-------------|---------|
| USGPM       | PSI     |
| 750         | 101-160 |

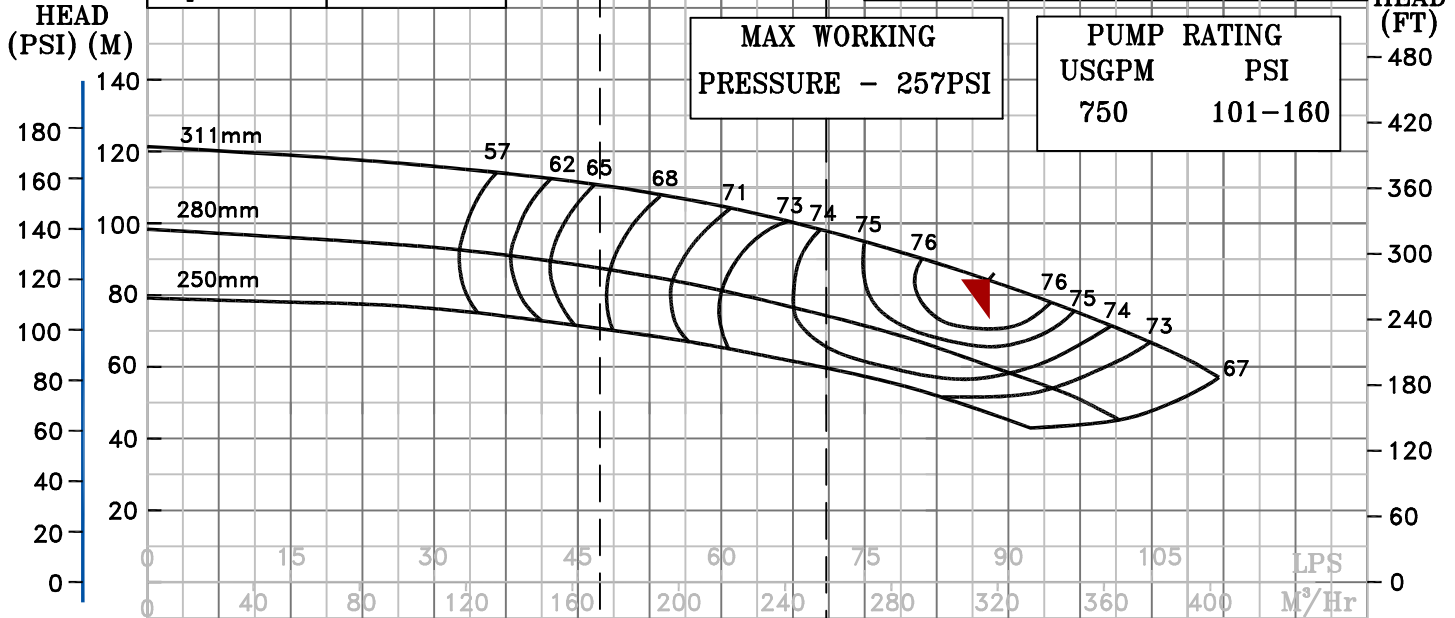

| NPSHr |      |
|-------|------|
| (M)   | (FT) |
| 6     | 18   |
| 4     | 12   |
| 2     | 6    |
| 0     | 0    |

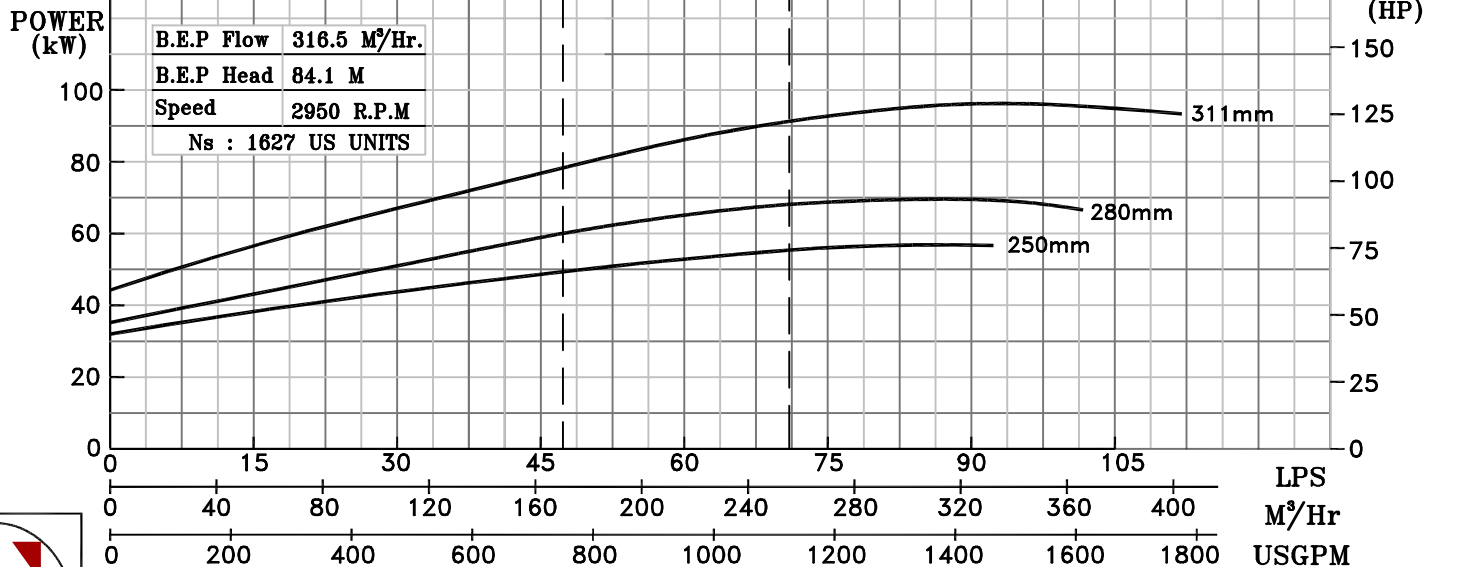

|                    |              |
|--------------------|--------------|
| B.E.P Flow         | 316.5 M³/Hr. |
| B.E.P Head         | 84.1 M       |
| Speed              | 2950 R.P.M   |
| Ns : 1627 US UNITS |              |



2950 RPM